

# MultiConnect™ OCG-D

## Open Communications Gateways - Device



### Benefits

- Linux-based open source software
- Proven hardware for the development and deployment of custom applications
- Cost-effective alternative to custom manufacturing
- Comprehensive service and developer support

The MultiConnect™ OCG-D open communications gateways\* with CoreCDP™ comprise an open Linux development environment and a fully certified hardware offering that includes multiple interfaces (serial, USB, Ethernet and SD card) and internal peripherals (including a cellular modem and a GPS receiver) in one application-ready end user solution.

Applications that require device networking capability can now be embedded directly onto select Multi-Tech hardware. The MultiConnect OCG-D brings together a cellular hardware development kit and Multi-Tech's CoreCDP, a distribution version of the Linux operating system and complete Linux build environment, to create custom applications in a very short period of time. The Multi-Tech MultiConnect OCG-D provides a flexible, quick and cost-effective way to bring your solution to market.

### Development Hardware

- Application-ready hardware platform
- Includes GPS and cellular modem
- Multiple interfaces available (serial, USB, Ethernet)
- 36-pin GPIO interface
- FCC, IC, UL, PTCRB and R&TTE certified

### CoreCDP™ Software


- Custom Linux distribution
- Provides complete Linux build environment
- Cross-compile thousands of open source software packages
- Create custom applications in a short period of time

### Support

- Advanced developer support available
- Established developer community available at [www.multitech.net](http://www.multitech.net)
- Two-year warranty

### Deployment Models

- Cellular-only and cellular/GPS models available
- Standard and customized deployment models available
- FCC, IC, UL, PTCRB and R&TTE certified

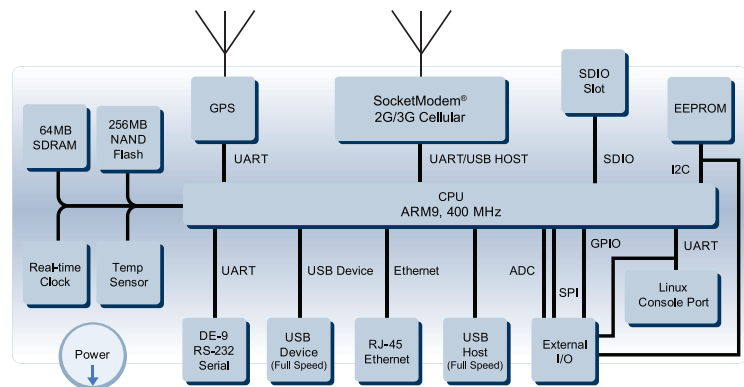

\* Formerly known as Cellular Development Platform.

## Highlights

**Custom Application Development and Deployment.** The MultiConnect OCG-D offers customers the opportunity to develop and deploy custom applications on the same product platform. Developer kits include all the hardware, cables and accessories required to develop unique applications. Once complete, deployment models are available for the sale and distribution of the solution within a proven and approved hardware platform.

**Linux-Based Open Source.** The MultiConnect OCG-D uses the OpenEmbedded framework as the base to provide a custom Linux distribution, known as CoreCDP. This allows developers to cross-compile thousands of open source software packages and to create custom applications in a very short period of time. In many cases, existing applications can easily be run with little or no modification.

**Carrier Approved.** All MultiConnect OCG-D developer kits and deployment models are PTCRB approved, relieving customers the burden and expense of obtaining these approvals independently. This also provides a faster time-to-market and improved return on investment.

**Multiple Interface Options.** The MultiConnect OCG-D provides the broadest range of interface options, including serial, USB host, and Ethernet, giving customers seamless connectivity to their applications.

**GPIO.** The 36-pin general purpose input/output connection, which includes SPI, I2C, serial, ADC, and GPS connections, provides multiple ways of interfacing with any application.

**Proof of Concept.** Customers planning their own internal custom developments can use the MultiConnect OCG-D to create beta units and prototypes for use in voice of customer and proof of concept activities. These models can be generated quickly and with little additional expense. The input from these activities can improve the feature set of the customer's final product.

## Comprehensive Service and Support

**Standard Support.** The Multi-Tech MultiConnect OCG-D includes a two-year product warranty on the hardware platform. This includes technical support, via the Multi-Tech online support portal, to assist with troubleshooting and basic hardware configurations.

**Developer Community and Support.** To support software developers who are using the MultiConnect OCG-D, Multi-Tech focuses on building better tools for collaborative software development using Multi-Tech products. This is an open environment where software developers can ask and respond to development-related questions regarding Multi-Tech products and access a variety of resources, including product documentation, application development examples, technical articles and much more.

You can also participate in developer forums on [www.multitech.net](http://www.multitech.net) to find and share ideas and tips. Moderated by Multi-Tech engineering professionals and the developer community, these forums address a wide variety of development topics to support your projects.

**Advanced Developer Support.** For developers needing dedicated support, Multi-Tech offers a fee-based support option available in 5-hour and 25-hour increments. Advanced Developer Support provides assistance with software issues, the porting of or cross-compiling of applications, use of peripherals and much more.

## Hardware Specifications

### Processor & Memory

- 400 MHz ARM9 CPU
- 256MB NAND flash
- 64MB SDRAM
- 2GB industrial grade SD Flash Card (included)

### Internal Peripherals

- RTC (Real Time Clock)
- Dedicated GPS receiver
- Cellular modem
- Debug 3 pin serial console port
- Temperature sensor

### Connections

- LAN: RJ-45, 10/100BaseT
- RS-232 Data: DB-9 female, 921.6K bps max serial speed
- GSM/GPS Antenna: 50 ohm SMA female
- Power: 2.5mm miniature screw
- SIM: Standard 1.8V & 3V SIM receptacle
- USB Host: USB 2.0 Full Speed (12 Mbps) Host connector
- USB Device: USB 2.0 Full Speed (12 Mbps) mini-B device connector
- GPIO: 36-pin molex connection
- SD Memory Flash Card: SD memory card slot


### GPIO Functions:\*

- Pins 1 - 9: General Purpose Input
- Pins 10 - 14: Analog Input
- Pins 15 - 24: General Purpose Output
- Pins 25 - 29: SPI
- Pins 30 - 31: Debug
- Pin 32: GPS PPS
- Pins 33 - 34: I2C
- Pin 35: No Connect
- Pin 36: Ground (SPI, I2C, Serial)

\* For more specifications on GPIO functionality, visit [www.multitech.net](http://www.multitech.net)

### Interfaces

- General Purpose LEDs: Power, Cellular Link Status, Ethernet Link, & Speed
- Programmable LEDs: 5 user-defined, application-specific LEDs

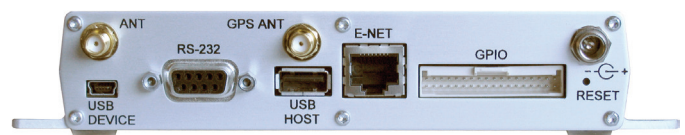

## Hardware Specifications (continued)

### Short Message Services - SMS

Text & PDU, Point-to-Point (MO/MT), cell broadcast

### GPS

Position: 2.5 meters

Acquisition: Hot start 1 second; cold start 29 seconds avg.

Sensitivity: Tracking -161 dBm

Protocol: NMEA-0183 V3.01, GGA, GLL, GSA, GSV, RMC, VTG

### Power Requirements

9 to 32VDC

### Physical Dimensions (L x W x H)

2.8" x 7.0" x 1.2"  
(7.1 cm x 17.8 cm x 3.0 cm)

### Weight

11.5 ounces (326 grams)

## CoreCDP Software Specifications

Linux Kernel 2.6.32.3

Utilizes OpenEmbedded framework

Tested with the following Linux OS:

Ubuntu 9.10 & 10.04

Fedora Core 12

OpenSUSE 12.1

Drivers to support all peripherals included on the platform hardware

Programming Languages: Python, Java (JamVM), Perl, Ruby, C/C++, PHP

Networking: PPP, iptables

Web Server: lighttpd

Remote shell: SSH

Database: sqlite3

Network file system: samba

Security: OpenSSL

| Specifications         | MTCDP-H4  | MTCDP-EV2  | MTCDP-E1   | MTCDP-G2  |
|------------------------|---|--|--|---|
| Performance            | HSPA  | CDMA2000 1xRTT<br>EV-DO Rev. A   | EDGE: E-GPRS Class 12<br>GPRS: Class 10  | GPRS Class 10                                       |
| Band, Frequency        | HSUPA/HSDPA/UMTS<br>Triple-band: 2100/1900/850<br>MHz with Rx diversity   | Dual-band 800/1900 MHz<br>CDMA; 800 MHz & 800/1900<br>MHz with R-UIM support | Quad-band<br>GSM/GPRS/EDGE<br>850/900/1800/1900 MHz  | Quad-band GSM<br>850/900/1800/1900 MHz              |
| Packet Data            | HSDPA data service of up to<br>7.2 Mbps<br>HSUPA data service of up to<br>5.76 Mbps   | Peak download 3.1 Mbps,<br>peak upload 1.8 Mbps                              | EDGE: E-GPRS Up to 240K<br>bps, coding scheme MCS1-9,<br>mobile station Class B, LLC<br>layer, 4 time slots<br><br>GPRS: Full PBCCH support,<br>coding scheme 1-4, mobile<br>station Class B | Up to 85.6K bps,<br>coding schemes CS1 to CS4       |
| <b>Environmental</b>   |   |  |  |   |
| Operating Temperature* | -22° to 140° F<br>(-30° to +60° C)*   | -40° to 167° F<br>(-40° to +75° C)*  | -31° to 167° F<br>(-35° to +75° C)*  | -40° to 185° F<br>(-40° to +85° C)*                 |
|                        | * UL Listed @ 104° F (40° C), limited by power supply. UL Certification does not apply or extend to an ambient above 104° F (40° C) and has not been evaluated by UL for ambient greater than 104° F (40° C). |  |  |   |
| Storage Temperature    | -40° to +185° F (-40° to +85° C)  |  |  |   |
| Humidity               | 20% to 90% RH, noncondensing  |  |  |   |
| <b>Certifications</b>  |   |  |  |   |
| EMC Compliance         | FCC Part 15, EN55022,<br>EN55024  | FCC Part 15  | FCC Part 15, EN55022, EN55024  |   |
| Radio Compliance       | FCC Part 22, 24, RSS132,133,<br>EN301 489-1, EN489-3<br>(-GP only), EN301 489-7,<br>EN301 511,<br>AS/ACIF S042.1, S042.3  | FCC Part 22, 24, RSS132, 133   | FCC Part 22, 24, RSS132,133, EN301 489-1, EN489-3<br>(-GP only), EN301 489-7, EN301 511, AS/ACIF S042.1, S042.3  |   |
| Safety                 | UL60950-1, cUL60950-1,<br>IEC60950-1  | UL60950-1, cUL60950-1,<br>IEC60950-1   | UL60950-1, cUL60950-1,<br>IEC60950-1   | UL60950-1, cUL60950-1,<br>IEC60950-1, AS/NZS60950-1 |
| Network                | PTCRB   | CDG 1&2  | PTCRB  |   |

## Ordering Information

### Developer Kits

Developer kits include: Modem with GPS receiver, universal power supply, GSM/GPS antenna, GPIO cable, serial debug cable, Ethernet cable, RS-232 cable, compact flash, USB cables, DVD, and screwdriver.

| Product                 | Description                                   | Region   |
|-------------------------|---|----------|
| MTCDP-H4-GP-P1-DK-1.0   | 3G, HSPA (Generic†) Developer Kit             | Regional |
| MTCDP-H4-GP-P2-DK-1.0   | 3G, HSPA (AT&T) Developer Kit                 | USA      |
| MTCDP-EV2-GP-N2-DK-1.0  | 3G, EVDO (Sprint) Developer Kit               | USA      |
| MTCDP-EV2-GP-N3-DK-1.0  | 3G, EVDO (Verizon Wireless) Developer Kit     | USA      |
| MTCDP-EV2-GP-N16-DK-1.0 | 3G, EVDO (Aeris Communications) Developer Kit | USA      |
| MTCDP-E1-GP-DK-1.0      | 2.5G EDGE Developer Kit                       | Global   |
| MTCDP-G2-GP-DK-1.0      | 2G, GPRS Developer Kit                        | Global   |

### Deployment Models (includes GPS receiver)\*

Deployment models are modem only. All accessories are sold separately.

| Product              | Description                                      | Region   |
|----------------------|--|----------|
| MTCDP-H4-GP-P1-1.0   | 3G, HSPA (Generic†) Deployment Model             | Regional |
| MTCDP-H4-GP-P2-1.0   | 3G, HSPA (AT&T) Deployment Model                 | USA      |
| MTCDP-EV2-GP-N2-1.0  | 3G, EVDO (Sprint) Deployment Model               | USA      |
| MTCDP-EV2-GP-N3-1.0  | 3G, EVDO (Verizon Wireless) Deployment Model     | USA      |
| MTCDP-EV2-GP-N16-1.0 | 3G, EVDO (Aeris Communications) Deployment Model | USA      |
| MTCDP-E1-GP-1.0      | 2.5G EDGE Deployment Model                       | Global   |
| MTCDP-G2-GP-1.0      | 2G, GPRS Deployment Model                        | Global   |

### Deployment Models\*

Deployment models are modem only. All accessories are sold separately.

| Product           | Description                                      | Region   |
|-------------------|--|----------|
| MTCDP-H4-P1-1.0   | 3G, HSPA (Generic†) Deployment Model             | Regional |
| MTCDP-H4-P2-1.0   | 3G, HSPA (AT&T) Deployment Model                 | USA      |
| MTCDP-EV2-N2-1.0  | 3G, EVDO (Sprint) Deployment Model               | USA      |
| MTCDP-EV2-N3-1.0  | 3G, EVDO (Verizon Wireless) Deployment Model     | USA      |
| MTCDP-EV2-N16-1.0 | 3G, EVDO (Aeris Communications) Deployment Model | USA      |
| MTCDP-E1-1.0      | 2.5G EDGE Deployment Model                       | Global   |
| MTCDP-G2-1.0      | 2G, GPRS Deployment Model                        | Global   |

### Developer Support

For developers needing dedicated support, Multi-Tech offers a fee-based support option. Advanced Developer Support provides assistance with software issues, the porting of or cross-compiling of applications, use of peripherals, and much more.

| Product | Description                  | Region |
|---------|------------------------------|--------|
| CDPS-5  | Developer Support - 5 hours  | Global |
| CDPS-25 | Developer Support - 25 hours | Global |

### Accessories

|                      |   |
|----------------------|---|
| CA-CDP-GPIO          | 36-pin, General Purpose Input/Output Cable (open ended)   |
| PS-9VCB-LBC-U-Global | 100 - 240V 9V-1.7A changeable blade power supply with three interchangeable blades (U.S., Euro, UK) |
| ANGSM-GPS-1MM        | GSM/GPS Combination Antenna, 9.8 feet (3 meters)  |
| CA-CDP-DEBUG         | 3-Pin, Serial Debug Cable, 6 feet (1.8 meters)  |
| CA9-9-D              | RS-232 Cable, DB9F-DB9M, 6 feet (1.8 meters)  |
| CA-RJ-45             | RJ45 (CAT5E, 10/100 Mbps) Cable, 6 feet (1.8 meters)  |
| CA-USB               | USB A/B Cable, 4.9 feet (1.5 meters)  |
| CA-USB-A-MINI-B      | USB A-to-Mini-B Cable, 3.9 feet (1.2 meters)  |

\* Custom deployment options available. Contact your Multi-Tech Systems representative for details.

† Europe, Rogers, Telus.

Produced in the US of US and non-US components.

Features and specifications are subject to change without notice.

**Trademarks / Registered Trademarks:** MultiConnect, CoreCDP, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / All other products and technologies are the trademarks or registered trademarks of their respective holders.

#### World Headquarters

Tel: (763) 785-3500  
(800) 328-9717

[www.multitech.com](http://www.multitech.com)

#### EMEA Headquarters

Multi-Tech Systems (EMEA)  
United Kingdom

Tel: +(44) 118-959 7774